



DOORTRONIX, INC  
5783 C.R. 1219  
MALAKOFF, TX 75148  
TEL: 888-453-5196  
FAX: 888-579-4639  
www.doortronix.com




THE NEXT GENERATION OF AUTOMATIC DOORS

**DOORTRONIX LINEAR BEARING 2100 SERIES**

**O - SX - SX - O  
BIPART FIXED SIDELITE**

**PROJECT INFORMATION**

PROJECT NAME:	
LOCATION:	
DOOR	
NUMBERS:	
DATE: SHEET:	SHEET: OF

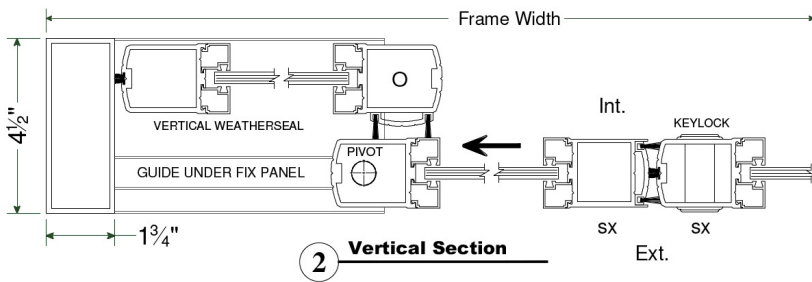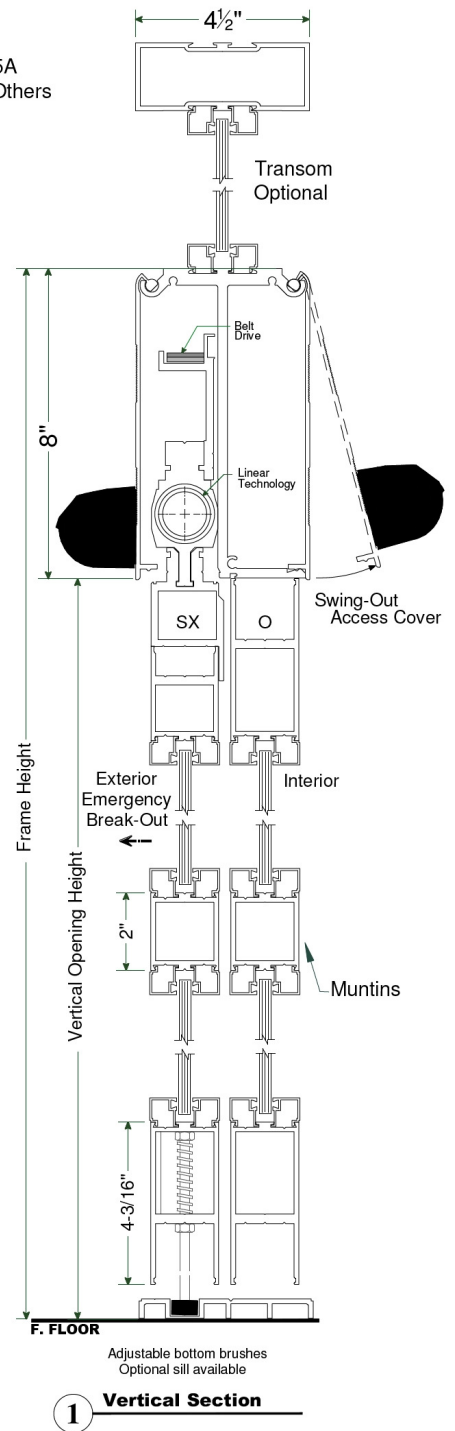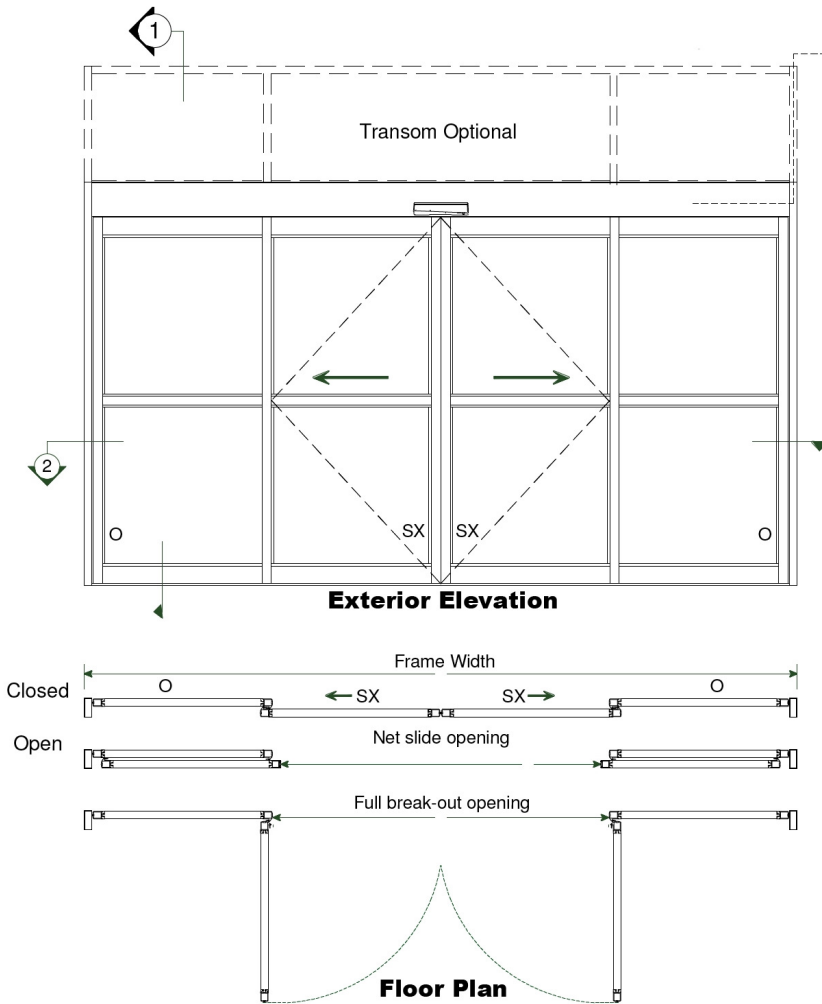

- NOTES**
- ELECTRICAL REQUIREMENTS: 120 VAC, 5 AMP MIN TO POWER OPERATOR BY ELECTRICAL CONTRACTOR.
  - ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
  - LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
  - SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

Model	Frame Width	Frame Height	Clear Door Opening	Vertical Opening Height	Full Breakout Opening	Rough Opening Width	Rough Opening Height
O-SX-SX-O	9'-0" (2743)	90" (2286)	42" (915)	82" (2083)	50" (1260)	108'-1/2" (2756)	90'-1/2" (2299)
O-SX-SX-O	10'-0" (3048)	90" (2286)	48" (1067)	82" (2083)	56" (1412)	120'-1/2" (3061)	90'-1/2" (2299)
O-SX-SX-O	12'-0" (3658)	90" (2286)	60" (1219)	82" (2083)	68" (1717)	144'-1/2" (3670)	90'-1/2" (2299)
O-SX-SX-O	14'-0" (4267)	90" (2286)	72" (1524)	82" (2083)	80" (2022)	168'-1/2" (4280)	90'-1/2" (2299)
O-SX-SX-O	16'-0" (4877)	90" (2286)	84" (1829)	82" (2083)	92" (2326)	192'-1/2" (4890)	90'-1/2" (2299)

\* Imperial (Metric - mm) - Consult Factory For Custom Sizes